

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 December 2000 (07.12.2000)


PCT

(10) International Publication Number
WO 00/73669 A1


- (51) International Patent Classification⁷: F16B 5/00, (74) Agents: DUNLOP, Alan, J., S. et al.; Hahn & Hahn Inc.,
B07B 1/46 222 Richard Street, Hatfield, 0083 Pretoria (ZA).
- (21) International Application Number: PCT/ZA00/00027 (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 21 February 2000 (21.02.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
99/03660 31 May 1999 (31.05.1999) ZA
99/04719 22 July 1999 (22.07.1999) ZA
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and
(72) Inventor: OWEN, David, Llewellyn [ZA/ZA]; 37 Main Road, Eastleigh, 1610 Edenvale (ZA). Published:
— With international search report.

[Continued on next page]

(54) Title: SCREENS

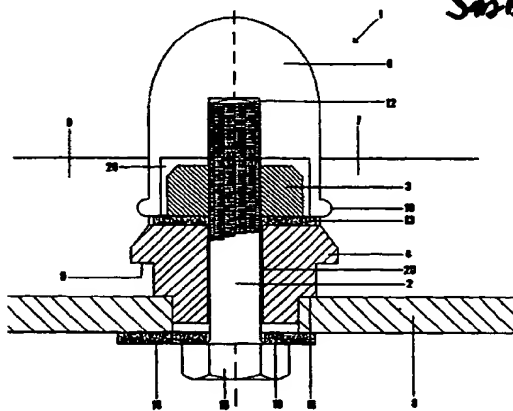

(57) Abstract: A fastening means (1) for fastening polyurethane screening panels (6, 7) to a screen (8) comprises a composite fastener and a disc and stringer support. The composite fastener is a steel bolt (2) and nut (3) with a polyurethane holding component (4) and a polyurethane cover (9) for the bolt head. The disc and stringer support is a stringer (31) serving as a joist spanning between girders of the screen frame, the stringer (31) having no flange and being narrow and deep, with discs (35) set in the top surface of the stringer at spaced apart positions, having a hole (36) in each disc for the bolt and nut and a recess (38) in the stringer underneath each disc for the nut. The bolt and nut have a toggle (14) which allows insertion into the hole in the disc and tightening the bolt and nut entirely from above the screen.

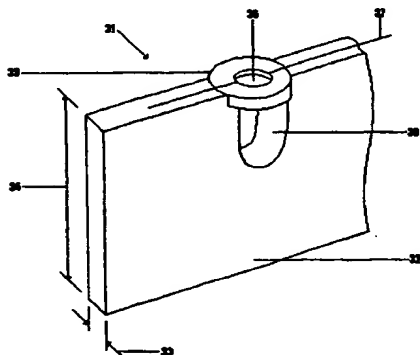

WO 00/73669 A1